

## Selection of Optimum Tunnel Support System Using Aggregated Ranking of SAW, TOPSIS and LA Methods

E. Tajvidi Asr<sup>\*</sup>, M. Hayaty, R. Rafiee, M. Ataie, S. E. Jalali

**Received:** 20 February 2015 ;

**Accepted:** 11 July 2015

**Abstract** The selection of optimum support system is a key step in the successful design operation of tunneling, rock mass stabilization and minimization of plastic zone extension around a tunnel. In this context, it is not sufficient to rely only on the experiences of design engineers, but taking all effective measures and parameters is necessary to do a proper choice. In this paper, multi attribute decision making (MADM) methods including simple additive weighting (SAW), technique for order preference by similarity to ideal solution (TOPSIS), and linear assignment (LA) are used for selection of a proper support system for Beheshtabad water transporting tunnel from among the six proposed support systems by considering the attributes of cost, safety factor, applicability, installation time, displacement and capable of mechanization. Aggregating the results of ranking by the ranks mean, borda and copland techniques led to the suggestion of a support system of injectional rock-bolt 3 m in length with 1.5×1.5 m distance together with shotcrete by 10 cm in thickness.

**Keywords:** Saw, Topsis, Linear Assignment (La), Support Systems, Aggregated Methods.

### 1 Introduction

Today, along with the increasing development of underground structures and their new and diverse applications, especially the inter-city and intra-city transport network, studying the resistance of these structures against static and dynamic loads in the design of such structures in terms of safety and cost has been attended. According to the obtained experiences, on the one hand, the design and construction of such structures in different environments are based on the special principles and methods. For example, rock mass is own used instead of conventional engineering materials in the construction of underground structures, so naturally followed by some uncertainty on some properties of rock and underground water. In order to deal with these uncertainties, it is necessary to perform a proper and flexible designing and also observe the safety in implementation. On the other hand, engineers often deal with situations in which they should select the appropriate option among the available alternatives. In the past, selecting the appropriate alternative was based on engineers' experiences and in accordance with existing laws, but such work today is possible with higher confidence degree by using the Multi Attribute Decision Making (MADM) methods. Several research about the

---

<sup>\*</sup> Corresponding Author. (✉)

E-mail: [e.tajvidi@shahroodut.ac.ir](mailto:e.tajvidi@shahroodut.ac.ir) (E. Tajvidi Asr)

E. Tajvidi Asr, M. Hayaty, R. Rafiee, M. Ataie, S. E. Jalali

Faculty of Mining, Petroleum and Geophysics, Shahrood University of Technology, Shahrood, Iran

issues related to mining, tunneling and underground spaces have been carried out using MADM methods that some of the most important of them are presented in Table 1.

As can be seen in Table 1, the methods such as Analytical Hierarchy Process (AHP) and Technique for Order Preference by Similarity to Ideal Solution (TOPSIS) alone or in combination with fuzzy logic have been used in most performed research to select the appropriate alternative (extraction method, transport system, loading, transportation, mining, maintenance, etc.) for underground structures.

**Table 1** Some of the mining and tunneling studies with different methods of MADM

| Topic                                                                        | Method       | Authors                | Year | Reference |
|------------------------------------------------------------------------------|--------------|------------------------|------|-----------|
| Selection of the appropriate monitoring system for drilling an open pit mine | AHP          | Dessureault and Scoble | 2000 | [1]       |
| Underground mining method selection                                          | AHP-Yager    | Karadogan et al.       | 2001 | [2]       |
| Selection of the transport system of mineral resources                       | PROMETHEE I  | Elevli et al.          | 2002 | [3]       |
| Selection of the transport system in coal mine                               | AHP-Yager    | Kesimal and Bascetin   | 2002 | [4]       |
| Surface mine equipment selection                                             | AHP          | Bascetin               | 2004 | [5]       |
| Selection of the transport system of mineral resources                       | PROMETHEE II | Elevli and Demirci     | 2004 | [6]       |
| Mining method selection                                                      | FAHP         | Bitarafan and Ataei    | 2004 | [7]       |
| Selection of the rock bolt system for underground mine                       | AHP          | Kazakidis et al.       | 2004 | [8]       |
| Location of cement plant                                                     | AHP          | Ataei                  | 2005 | [9]       |
| Open pit mining method selection                                             | PROMETHEE II | De Almeida et al.      | 2005 | [10]      |
| Choose an appropriate method of tunnel excavation                            | AHP          | Bottero, Peila         | 2005 | [11]      |
| Coal mining method selection                                                 | AHP          | Uysal and Demirci      | 2006 | [12]      |
| Selection of the transport system in open pit mine                           | AHP-Yager    | Bascetin et al         | 2006 | [13]      |
| Choosing drilling machine in tunneling operations.                           | AHP-Yager    | Acaroglu et al         | 2006 | [14,15]   |
| Selection of the product type of mining company                              | AHP          | Wu et al.              | 2007 | [16]      |
| Selection of the system of loading and transportation in open pit mine       | AHP-TOPSIS   | Aghajani, Osanloo      | 2007 | [17]      |
| Selection of the method for extracting a platinum mine                       | AHP          | Musingwini and minnitt | 2008 | [18]      |
| Underground mining method selection                                          | AHP-TOPSIS   | Ataei et al.           | 2008 | [19,20]   |
| Underground mining method selection                                          | FAHP         | Zare Naghadehi et al.  | 2008 | [21]      |
| Selection of the support system in main tunnels of underground mine          | AHP          | Yavuz et al. (2008)    | 2008 | [22]      |
| Underground mining method selection                                          | FAHP         | Karadogan et al.       | 2008 | [23]      |
| Underground mining method selection                                          | AHP-Yager    | Alpay, Yavuz           | 2009 | [24]      |
| Selection of the support system in an underground mine access tunnel         | AHP          | Oraee et al.           | 2009 | [25]      |
| Mining method selection                                                      | FAHP         | Azadeh et al.          | 2009 | [26]      |
| Location of beneficiation plant                                              | AHP          | Safari et al.          | 2009 | [27]      |
| Selection of the tunnel support system                                       | AHP-TOPSIS   | Oraee et al.           | 2010 | [28]      |
| Fire risk assessment system for underground mining of coal                   | AHP          | Lang and Fu-bao        | 2010 | [29]      |
| Mining method selection                                                      | FAHP         | Azadeh et al.          | 2010 | [30]      |
| Selection of the bench height in open pit mining                             | VIKOR        | Soltanmohammadi et al. | 2010 | [31]      |

| Topic                                          | Method            | Authors                             | Year | Reference |
|------------------------------------------------|-------------------|-------------------------------------|------|-----------|
| Selection of the surface mine equipment        | VIKOR             | Aghajani Bazzazi et al.             | 2011 | [32]      |
| Evaluation of tunnel boring methods            | FAHP-TOPSIS       | Golestanifar et al.                 | 2011 | [33]      |
| Risk assessment of tunneling projects          | Fuzzy TOPSIS      | Fouladgar et al.                    | 2012 | [34]      |
| Selection of the Tunnel Boring Machine (TBM)   | Fuzzy TOPSIS-FAHP | Yazdani-Chamzini and Haji Yakhchali | 2012 | [35]      |
| Risk management of underground mining projects | AHP               | Badri et al.                        | 2013 | [36]      |
| Choosing the best ventilation system           | FAHP              | Mirhedayatian et al.                | 2013 | [37]      |
| Choosing the best ventilation system           | VIKOR-SWARA       | Hashemkhani Zolfani et al.          | 2013 | [38]      |
| Surface mine equipment selection               | FNAP-TOPSIS       | Rahimi Ghazikalayeh et al.          | 2013 | [39]      |

Because on the one hand, there are several technical and economic criteria in selecting a proper support system for tunnels and on the other hand, methods that are used for designing the support system generally are based on the preferences of designers and their work experience, possibility of a careful choice of an appropriate support system in terms of technical, economic and safety is difficult. Therefore, proposing an appropriate method seems necessary in this context.

In current work, proper support system is selected for Beheshtabad water transporting tunnel using SAW, TOPSIS and LA methods by considering of effective attributes. Finally, the optimum support system is suggested using aggregating techniques that is economically and safety suitable.

## 2 Multi-Attribute Decision Making Methods (MADM)

In MADM problems, any alternative is evaluated by several attributes and selecting an alternative is performed by determining the desired level for the criteria or pair-wise comparison of criteria and alternatives. The best alternative in the multi attribute models will be an alternative which provides the most preferable value of each existing feature. Base of modeling is creating and establishing the contingency table [40].

Among the most common MADM methods we can point out to Simple Additive Weighting (SAW), TOPSIS and Linear Assignment (LA). First, the performance of alternatives must be evaluated in terms of attributes in all three methods.

Therefore, decision matrix is generated as follows:

$$X = \begin{bmatrix} x_{11} & \cdots & x_{1n} \\ \vdots & \cdots & \vdots \\ x_{m1} & \cdots & x_{mn} \end{bmatrix} \quad (1)$$

in which  $x_{ij}$  is the performance of alternative  $i$  ( $i=1,2,\dots,m$ ) in related to the attribute  $j$  ( $j=1,2,\dots,n$ ).

On the use of SAW, TOPSIS and LA, determining the relative importance of existing attributes is an effective step in problem solving process. Therefore, we can use methods such as using the expert opinions, Shannon entropy and eigenvector method [41]. After formation of the decision matrix and determination of the importance coefficient of attributes, the methods used are as follows:

## 2.1 SAW method

This method, also called the weighted linear combination method was suggested in 1981 by Hwang and Yoon. In this way, the matrix's arrays are considered as mean of elements, and weights of attributes are considered as the weight of these numbers. Using this method rely on the assumption of preference independence and being separated of attributes from each other, and is done during the following steps [42]:

- Normalization of decision matrix is done by linear method for positive and negative attributes is done respectively with the following equations:

$$r_{ij} = \frac{x_{ij}}{\max_i \{x_{ij}\}} \quad (2)$$

$$r_{ij} = \frac{\min_i \{x_{ij}\}}{x_{ij}} \quad (3)$$

- Determination of the weight vector of criteria which are defined according to importance coefficient of different criteria in decision making as  $[w_1, w_2, \dots, w_n]$ .
- Selection of the best option that is determined from the following equation:

$$A^* = \{A_i \mid \max_i \frac{\sum_{j=1}^m w_j r_{ij}}{\sum_{j=1}^m w_j}\} \quad (4)$$

By assumption of the total weight of the attribute equal to 1:

$$A^* = \{A_i \mid \max_i \sum_{j=1}^m w_j r_{ij}\} \quad (5)$$

## 2.2 TOPSIS method

In this technique, the positive ( $A^+$ ) and negative ( $A^-$ ) ideal solutions are defined on Euclidean space, and then distances of alternative  $i$  from these solutions are computed. The base of alternatives ranking is farness from  $A^-$  and closeness to  $A^+$ . On the detection of positive and negative ideal solutions, it is important to note that appropriateness of each attribute should be steadily increasing (or decreasing) and in this case, the best present value of an attribute is representative its positive ideal and the worst value belongs to its negative one [42]. Steps of TOPSIS method are as follows:

- Normalization of decision matrix using Euclidean norm by the following equation:

$$r_{ij} = \frac{x_{ij}}{\sqrt{\sum_{i=1}^m x_{ij}^2}} \quad (6)$$

in which, the attribute  $i$  and  $j$  are indicators of desired alternative and attribute, respectively.

- Creating a weighted normalized decision matrix (V) as the product of the normalized decision matrix in weight vector of attributes:

$$v_{ij} = w_j r_{ij} \quad j = 1, \dots, n; i = 1, \dots, m. \quad (7)$$

- Identifying the positive and negative ideal solutions as follows:

$$A^+ = \{v_1^+, v_2^+, \dots, v_j^+, \dots, v_n^+\} \quad (8)$$

$$A^- = \{v_1^-, v_2^-, \dots, v_j^-, \dots, v_n^-\} \quad (9)$$

which  $v_j^+$  and  $v_j^-$  are respectively the best and worst value of attribute  $j$  of all the alternatives.

The alternatives cited in  $A^+$  and  $A^-$ , respectively indicating better and worse alternatives.

- Calculating the relative distance from  $A^+$  and  $A^-$  by the following equations:

$$S_i^+ = \sqrt{\sum_{j=1}^n (v_{ij} - v_j^+)^2} \quad (10)$$

$$S_i^- = \sqrt{\sum_{j=1}^n (v_{ij} - v_j^-)^2} \quad (11)$$

- Calculating the relative closeness attribute by the following equation:

$$C_i^+ = \frac{S_i^-}{S_i^+ + S_i^-} \quad (12)$$

The value of this attribute changes between 0 and 1. Whatever desired alternative is more similar to ideal, distance would be much farther away from zero and its relative closeness attribute would be closer to one.

- Ranking alternatives based on highest value of relative closeness attribute.

## 2.3 LA method

Multi-attribute decision making methods are used to select the most appropriate choice among  $m$  available alternatives, and a distinctive feature of them is the presence of a few countable predetermined alternatives. The best alternative in a multi-attribute model is an alternative which provides the most preferred value from each available feature. Modeling is based on the development and formation of consistency table [40].

One of the most important methods in order to select the most appropriate option among  $m$  available alternatives is the linear assignment method. Ranking in linear assignment method is based on scores of assumed alternatives of each attribute in a special problem and the final rank of the alternatives is determined by a linear compensation process. In this method, based on the simplex property of solution space, while considering all the arrangements implicitly, optimal solution is extracted within a convex simplex space. In addition, the compensatory feature of attributes obtained from exchange between the alternatives and ranks, although the attribute weight vector is obtained based on expert's opinions. The main advantage of this MADM method is taking advantage of both hard and soft (hybrid) techniques. In soft decision-making techniques, describing the model is based on a contingency table, while in hard decision-making techniques, the model is defined based on mathematical equations system. Apparently, the hybrid decision-making techniques follow the logic of soft techniques, and are defined based on the contingency table but take advantage of mathematical equations system practically in the solution process; therefore, they have strengths of both hard and soft techniques. On the one hand, this method causes exchange between attributes using a simple raking for the alternatives and lacks complicated calculations, and on the other hand, there is no requirement for assimilating measurement scales, and the attributes can be of any scale [43].

The stages of applying this ranking method are as follows [43]:

- Determining the rank of any risk for each attribute: formation of a matrix ( $m \times m$ ), which its row and column indicates the rank and attribute respectively.

- Forming the allocation matrix or gamma matrix ( $\gamma$ ): formation of a square matrix ( $m \times m$ ) with line as  $i$  showing risk and column as  $k$  showing rank. Components of  $\gamma$  matrix ( $\gamma_{ik}$ ) are the total weight of the attributes which its  $i$ th risk has  $k$ th rank. Gamma matrix is an allocation matrix that its optimal answer can be obtained using any of the allocation methods (transport, Hungarian method, grid method and linear programming method (0,1)). The most common solution method in linear assignment method is the Linear Programming method.
- Ranking by linear programming: Ranking is done according to the following models.

$$\text{Max } Z = \sum_{i=1}^m \sum_{k=1}^m \gamma_{ik} h_{ik} \quad (13)$$

$$\sum_{k=1}^m h_{ik} = 1, \quad i=1, 2, \dots, 25 \quad (14)$$

$$\sum_{i=1}^m h_{ik} = 1, \quad k=1, 2, \dots, 25, \quad h_{ik} = 0 \text{ or } 1 \quad (15)$$

where  $h_{ik}$  is a binary variable which means risk factor  $i$  takes  $k$  rank when be equal 1.

### 3 Aggregation techniques of MADM

With various MADM techniques, there is the possibility of different ranking for the same issue. In this case, it is possible to use aggregating techniques such as ranks mean, Borda, and Copland in order to assemble different ranks for obtaining the final value [40], [41].

#### 3.1 Ranks mean technique

In this technique, the alternatives are prioritized based on the achieved arithmetic mean of ranks from different MADM methods [41]. Obviously the alternatives with the highest arithmetic mean will be in preference.

#### 3.2 Borda technique

This technique is based on majority rule, and rank of each pair in different ranking ways is compared with each other. If the preferences of alternative  $K$  is on alternative  $L$  be more than the preferences of alternative  $L$  on alternative  $K$ , it means win ( $M$ ) and if the former be less than or equal to the later, it means lost ( $X$ ). In this condition, priority attribute for each alternative is considered as the summation of their win ( $M_s$ ) [41].

#### 3.3 Copland technique

This technique can be called correction of previous techniques, since, in addition to  $M_s$ , the numbers of  $X_s$  are also considered in prioritization. In other words, the score of each alternative in Copeland technique is calculated based on the difference of the number of wins and losts in accordance with the following equation [40]:

$$T_i = \sum M_i - \sum X_i \quad (16)$$

## 4 Case study: Beheshtabad Water Transporting Tunnel

### 4.1 Geomechanical properties of area


Beheshtabad Water Transporting Tunnel with a length of approximately 65 km and a diameter of 6 m and horseshoe cross-section which is one of the biggest projects for remedying the lack of water supplies in the sectors of drinking, industrial and agricultural in the central plateau of Iran, with an estimate of 1070 million cubic meters per year. The tunnel in northeast-southwest direction is located near the Ardal town of Isfahan province [44]. The geotechnical characteristics of the area are presented in Table 1.

**Table 1** Geomechanical properties of Beheshtabad Tunnel [44]

|                         |                     |
|-------------------------|---------------------|
| $\rho(\frac{kg}{cm^3})$ | 2720                |
| $E(Pa)$                 | $1 \times 10^9$     |
| $G_m(Pa)$               | $4.038 \times 10^8$ |
| $\phi(^{\circ})$        | 30                  |
| $C(Pa)$                 | $1.5 \times 10^6$   |
| $\nu$                   | 0.3                 |

### 4.2 Tunnel geometry

Beheshtabad tunnel excavation is done by blasting method in several stages because of weakness of its site. The purpose of this drilling plan is reducing the spread of the plastic zone and enhancing the performance of the operation. To analyze the stability of the tunnel, numerical software Flac2D was used due to continuous environment. Figures 2 and 3 indicate the process of model constructing in the mentioned software according to excavation stages. In figures 4 and 5, the vertical stress ( $S_{yy}$ ) and vertical displacement around the tunnel after excavation are also shown. For the constructed model, six types of support system are considered in Table 2 [44].

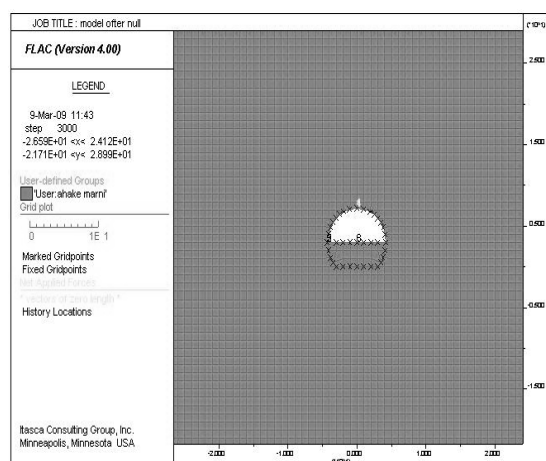

**Fig. 2** The first step of tunnel excavation

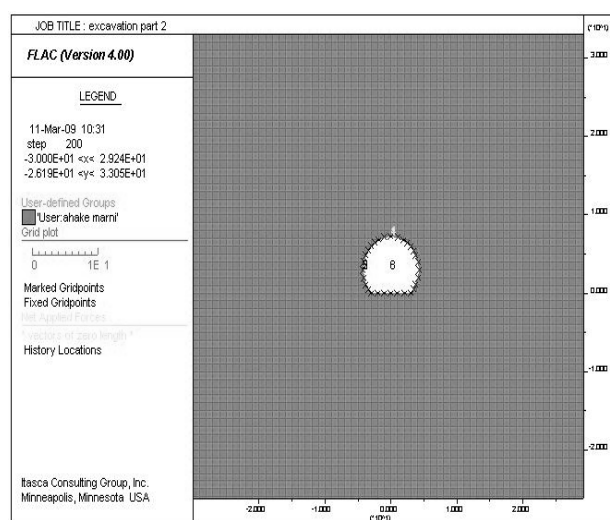


Fig. 3 The second step of tunnel excavation

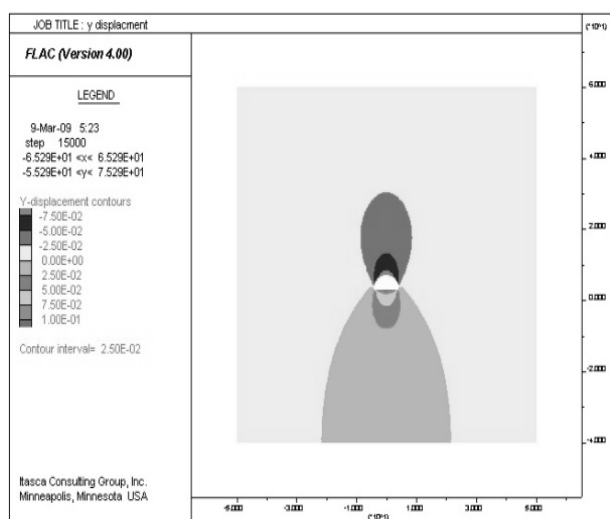


Fig. 4 Stress and displacement around the tunnel at the first phase of excavation

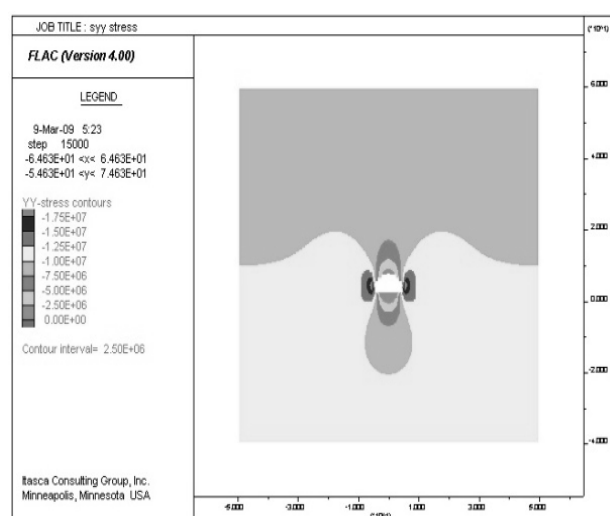


Fig. 5 Stress and displacement around the tunnel at the second phase of excavation

**Table 2** Proposed support systems for Beheshtabad tunnel


| Support system | Definitions                                                                                                                     |
|----------------|---------------------------------------------------------------------------------------------------------------------------------|
| A              | The combination of Shotcrete by 25 cm in thickness together with IP <sub>180</sub>                                              |
| B              | The combination of Shotcrete by 30 cm in thickness together with IP <sub>160</sub>                                              |
| C              | The combination of Shotcrete by 20 cm in thickness together with wire mesh                                                      |
| D              | The combination of Shotcrete with steel fiber by 20 cm in thickness                                                             |
| E              | Application of Injectional rock-bolt 3 m in length with $1.5 \times 1.5$ distance together with Shotcrete by 10 cm in thickness |
| F              | Application of injectional rock-bolt 3 m in length with $2 \times 2$ distance together with Shotcrete by 20 cm in thickness     |

## 5 Optimum support system selection

Selection is done based on the obtained results from numerical studies and expert's opinions.

### 5.1 Decision matrix

In this study, six attributes including cost ( $C_1$ ), safety factor ( $C_2$ ), applicability of support system ( $C_3$ ), installation time ( $C_4$ ), displacement ( $C_5$ ) and the capability of mechanization ( $C_6$ ) have been considered in selection of tunnel support system. The selection process of support system in this study includes 6 attributes and 6 alternatives that its hierarchical structure is shown in Figure 6.

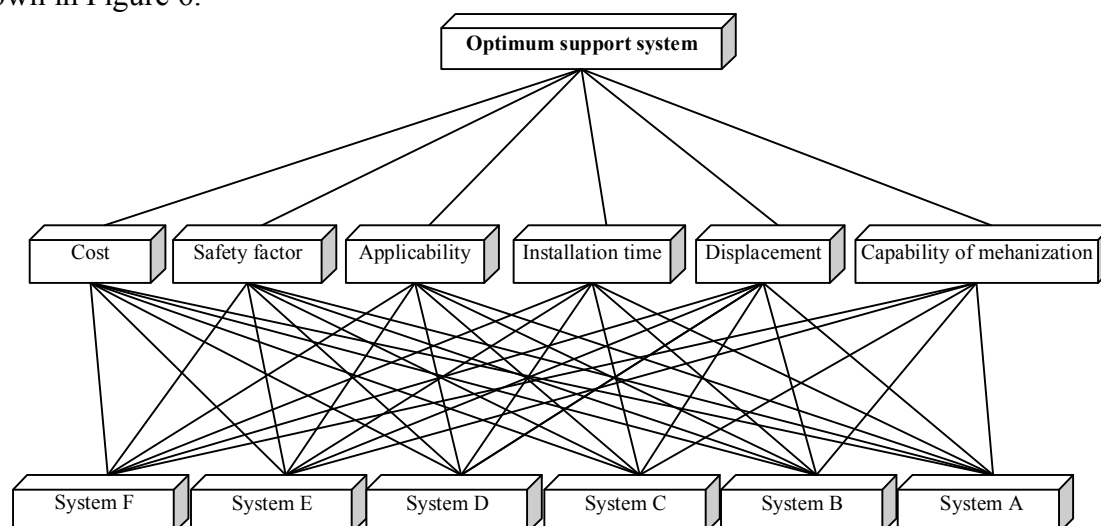**Fig. 6** Hierarchy design for the tunnel support selection

In order to determine important coefficient of attributes, their pair-wise comparisons  $6 \times 6$  matrix are formed and using the eigenvector method, the weight of each of them is obtained, as shown in Table 3.

**Table 3** Final weight of attributes

| Attributes    | Weight | Attributes        | Weight | Attributes                  | Weight |
|---------------|--------|-------------------|--------|-----------------------------|--------|
| Cost          | 0.27   | Applicability     | 0.19   | Displacement                | 0.11   |
| Safety factor | 0.23   | Installation time | 0.16   | Capability of mechanization | 0.04   |

The quantitative attributes of cost, safety factor and displacement are obtained through the economic analysis and numerical modeling. Therefore, their quantitative amounts in the decision matrix will be directly set in related cells. The applicability, installation time and the capability of mechanization attributes are qualitative that are evaluated by qualitative terms such as very low, low, medium, high and very high. In table 4, the initial decision matrix is presented, including quantitative and qualitative arrays.

**Table 4** Initial decision matrix (quantitative and qualitative)

| Support system | Cost (Rials) | Safety factor | Applicability | Time      | Displacement (m) | Mechanization |
|----------------|--------------|---------------|---------------|-----------|------------------|---------------|
| A              | 15100900     | 1.572         | Low           | High      | 0.0197           | Low           |
| B              | 13926000     | 1.64          | Very low      | Very high | 0.0187           | Low           |
| C              | 11598610     | 1.51          | High          | Low       | 0.0208           | Low           |
| D              | 10760000     | 1.71          | High          | Very low  | 0.0210           | Very high     |
| E              | 5939820      | 2.037         | Very high     | Medium    | 0.0224           | High          |
| F              | 6304900      | 1.3           | Very high     | Medium    | 0.0220           | Medium        |

For the purpose of quantifying the qualitative attributes, bipolar scale has been used. Therefore, instead of terms very low, low, medium, high and very high, the numbers 1, 3, 5, 7 and 9 are used respectively. The final decision matrix is presented in Table 5. In this matrix, the attributes of cost, installation time, and displacement have negative aspects, while safety factor, applicability and capability of mechanization attributes have positive aspects. It should be noted that all these attributes are independent of each other.

**Table 5** Final decision matrix (quantitative)

| Support system | Cost (Rials) | Safety factor | Applicability | Time | Displacement (m) | Mechanization |
|----------------|--------------|---------------|---------------|------|------------------|---------------|
| A              | 15100900     | 1.572         | 3             | 7    | 0.0197           | 3             |
| B              | 13926000     | 1.64          | 1             | 9    | 0.0187           | 3             |
| C              | 11598610     | 1.51          | 7             | 3    | 0.0208           | 3             |
| D              | 10760000     | 1.71          | 7             | 1    | 0.0210           | 9             |
| E              | 5939820      | 2.037         | 9             | 5    | 0.0224           | 7             |
| F              | 6304900      | 1.3           | 9             | 5    | 0.0220           | 5             |

## 5.2 Prioritization of alternatives by SAW method

In this way, the decision matrix is normalized using a linear method (equations 2 and 3) at first that the results are shown in Table 6.

**Table 6** The normalized decision matrix in SAW method

| Support system | C <sub>1</sub> | C <sub>2</sub> | C <sub>3</sub> | C <sub>4</sub> | C <sub>5</sub> | C <sub>6</sub> |
|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| A              | 0.393          | 0.772          | 0.333          | 0.143          | 0.949          | 0.333          |
| B              | 0.427          | 0.805          | 0.111          | 0.111          | 1              | 0.333          |
| C              | 0.512          | 0.741          | 0.778          | 0.333          | 0.899          | 0.333          |
| D              | 0.552          | 0.839          | 0.778          | 1              | 0.930          | 1              |
| E              | 1              | 1              | 1              | 0.2            | 0.835          | 0.778          |
| F              | 0.942          | 0.638          | 1              | 0.2            | 0.850          | 0.556          |

Then, the weighted decision matrix is calculated from multiplying the importance coefficient of each attribute by the corresponding cells in the normalized decision matrix, in accordance

with Table 7. The final weight of the alternatives is obtained by summing the rows of weighted decision matrix which the results are provided in Table 8.

**Table 7** The weighted decision matrix in SAW method

| Support system | C <sub>1</sub> | C <sub>2</sub> | C <sub>3</sub> | C <sub>4</sub> | C <sub>5</sub> | C <sub>6</sub> |
|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| A              | 0.106          | 0.177          | 0.063          | 0.023          | 0.104          | 0.013          |
| B              | 0.115          | 0.185          | 0.021          | 0.018          | 0.110          | 0.013          |
| C              | 0.138          | 0.170          | 0.148          | 0.053          | 0.099          | 0.013          |
| D              | 0.149          | 0.193          | 0.148          | 0.160          | 0.102          | 0.040          |
| E              | 0.270          | 0.230          | 0.190          | 0.032          | 0.092          | 0.031          |
| F              | 0.254          | 0.147          | 0.190          | 0.032          | 0.094          | 0.031          |

**Table 8** The final weight of alternatives based on SAW method

| Support system | A     | B     | C     | D     | E     | F     |
|----------------|-------|-------|-------|-------|-------|-------|
| Final weight   | 0.488 | 0.462 | 0.622 | 0.792 | 0.845 | 0.729 |

### 5.3 Prioritization of alternatives by TOPSIS method

In this procedure, using equations 6 and 7, respectively, the normalized and the weighted decision matrix are composed according to Tables 9 and 10. Thereafter, the ideal positive and negative solutions are calculated for each attribute respectively using equations 8 and 9, respectively (Table 11). Alternative distances from the ideal positive and negative solutions and also relative closeness attribute of each alternative are presented in Table 12.

**Table 9** The normalized decision matrix in TOPSIS method

| Support system | C <sub>1</sub> | C <sub>2</sub> | C <sub>3</sub> | C <sub>4</sub> | C <sub>5</sub> | C <sub>6</sub> |
|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| A              | 0.552          | 0.391          | 0.183          | 0.508          | 0.389          | 0.222          |
| B              | 0.509          | 0.407          | 0.061          | 0.653          | 0.370          | 0.222          |
| C              | 0.424          | 0.375          | 0.426          | 0.218          | 0.411          | 0.222          |
| D              | 0.394          | 0.425          | 0.426          | 0.073          | 0.397          | 0.667          |
| E              | 0.217          | 0.506          | 0.548          | 0.363          | 0.443          | 0.519          |
| F              | 0.231          | 0.323          | 0.548          | 0.363          | 0.435          | 0.371          |

**Table 10** The final weight of alternatives based on TOPSIS method

| Support system | C <sub>1</sub> | C <sub>2</sub> | C <sub>3</sub> | C <sub>4</sub> | C <sub>5</sub> | C <sub>6</sub> |
|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| A              | 0.149          | 0.090          | 0.035          | 0.081          | 0.043          | 0.009          |
| B              | 0.138          | 0.094          | 0.012          | 0.104          | 0.041          | 0.009          |
| C              | 0.115          | 0.086          | 0.081          | 0.035          | 0.045          | 0.009          |
| D              | 0.106          | 0.098          | 0.081          | 0.012          | 0.044          | 0.027          |
| E              | 0.059          | 0.116          | 0.104          | 0.058          | 0.049          | 0.021          |
| F              | 0.062          | 0.074          | 0.104          | 0.058          | 0.048          | 0.015          |

**Table 11** The ideal positive and negative solutions for each attribute

|                                | C <sub>1</sub> | C <sub>2</sub> | C <sub>3</sub> | C <sub>4</sub> | C <sub>5</sub> | C <sub>6</sub> |
|--------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|
| <b>Ideal positive solution</b> | 0.059          | 0.116          | 0.104          | 0.012          | 0.041          | 0.027          |
| <b>Ideal negative solution</b> | 0.149          | 0.074          | 0.012          | 0.104          | 0.049          | 0.009          |

**Table 12** Alternative distances and their relative closeness attribute

| Support system | Si-   | Si+   | Ci    |
|----------------|-------|-------|-------|
| A              | 0.137 | 0.037 | 0.211 |
| B              | 0.156 | 0.024 | 0.134 |
| C              | 0.074 | 0.105 | 0.587 |
| D              | 0.056 | 0.127 | 0.693 |
| E              | 0.047 | 0.144 | 0.752 |
| F              | 0.064 | 0.135 | 0.678 |

### 5.4 Prioritization of alternatives by LA method

In this method, according to the decision matrix, the rank of each alternative is determined for each of existing attributes. Accordingly, in accordance with Table 13, a 6×6 matrix has been constructed which its rows and columns indicate rank and attribute, respectively.

**Table 13** Determine the rank of alternatives per attribute

| Rank | C <sub>1</sub> | C <sub>2</sub> | C <sub>3</sub> | C <sub>4</sub> | C <sub>5</sub> | C <sub>6</sub> |
|------|----------------|----------------|----------------|----------------|----------------|----------------|
| 1    | E              | E              | E              | D              | B              | D              |
| 2    | F              | D              | F              | C              | A              | E              |
| 3    | D              | B              | C              | E              | D              | F              |
| 4    | C              | A              | D              | F              | C              | A              |
| 5    | B              | C              | A              | A              | F              | B              |
| 6    | A              | F              | B              | B              | E              | C              |

The next step in LA method is forming the allocation matrix (Table 14) that is a 6×6 matrix and its row and column indicate  $i$  alternative (support system) and  $k$  rank, respectively. Components of the matrix are the summation of the weight of attributes where their  $i$ th alternative has  $k$ th rank. Thereafter, the final rank of each alternative has been calculated by solving the linear programming model of equation 13 using LINGO software.

**Table 14** Allocation matrix in LA method

| Support System | R1   | R2   | R3   | R4   | R5   | R6   |
|----------------|------|------|------|------|------|------|
| A              | 0    | 0.11 | 0    | 0.27 | 0.35 | 0.27 |
| B              | 0.11 | 0    | 0.22 | 0    | 0.31 | 0.35 |
| C              | 0    | 0.16 | 0.19 | 0.38 | 0.23 | 0.04 |
| D              | 0.2  | 0.23 | 0.38 | 0.19 | 0    | 0    |
| E              | 0.69 | 0.04 | 0.16 | 0    | 0    | 0.11 |
| F              | 0    | 0.46 | 0.04 | 0.16 | 0.11 | 0.23 |

### 5.5 Final prioritization of alternatives

Ranking of the alternatives (support systems) is proposed according to the SAW, TOPSIS, and LA method in the first three columns of Table 15. As can be seen, the ranks of some alternatives are different in three desired methods. For aggregating the obtained ranks, Ranks Mean, Borda and Copland techniques were used which results are provided in the last three columns of Table 15. According to the obtained results, support system E has been taken the first rank in all aggregating methods and D, F, C, A and B systems have been gained the

second to the sixth ranks respectively. Thus, the system E is recommended as a proper support system for the tunnel.

**Table 15** Ranking of support systems and aggregating results

| Support system | Ranking by MADM methods |        |    | Final ranking by aggregating techniques |       |         |
|----------------|-------------------------|--------|----|-----------------------------------------|-------|---------|
|                | SAW                     | TOPSIS | LA | Ranks Mean                              | Borda | Copland |
| A              | 5                       | 5      | 5  | 5                                       | 5     | 5       |
| B              | 6                       | 6      | 6  | 6                                       | 6     | 6       |
| C              | 4                       | 4      | 4  | 4                                       | 4     | 4       |
| D              | 2                       | 2      | 3  | 2.3                                     | 2     | 2       |
| E              | 1                       | 1      | 1  | 1                                       | 1     | 1       |
| F              | 3                       | 3      | 2  | 2.7                                     | 3     | 3       |

## 6 Conclusion

The selection of proper support system for tunnel depends on the consideration of numerous effective factors. It is impossible by numerical methods properly. MADM Methods are appropriate scientific solutions for dealing with such engineering problems. In current study, the most important MADM methods including SAW, TOPSIS, and LA have been used in the selection of support system in Beheshtabad tunnel and six of cost, safety factor, time, displacement, capability of mechanization and applicability attributes have been studied. Aggregating the obtained results of ranking by Ranks Mean, Borda and Copland techniques, among the six support systems, injectional rock-bolt 3 m in length with 1.5×1.5 m distance with shotcrete by 10 cm in thickness is proposed as a proper support system.

## References

1. Dessureault, S., Scoble, M. J., (2000). Capital investment appraisal for the integration of new technology into mining systems, Transactions of the Institution of Mining and Metallurgy (Section A: Mining Technology), 109, A30-A40.
2. Karadogan, A. , Bascetin, A. , Kahriman, A., Gorgun, S., (2001). A new approach in selection of underground mining method, Proceedings of the International Conference Modern Management of Mine Producing, Geology and Environment Protection, 171– 183.
3. Elevli, B. , Demirci, A., Dayi, O., (2002). Underground haulage selection: shaft or ramp for a small-scale underground mine, The Journal of The South African Institute of Mining and Metallurgy, 102, 255– 260.
4. Kesimal, A., Bascetin, A., (2002). Application of fuzzy multi attribute decision making in mining operations, Mineral Resource Engineering, 11, 59–72.
5. Bascetin, A., (2004). An application of the analytic hierarchy process in equipment selection at Orhaneli open pit coal mine, Mining Technology (Trans. Inst. Min. Metall. A), 113, A192-A199.
6. Elevli, B., Demirci, A., (2004). Multi criteria choice of ore transport system for an underground mine: application of PROMETHEE methods, The Journal of The South African Institute of Mining and Metallurgy, 251–256.
7. Bitarafan, M. R., Ataei, M., (2004). Mining method selection by multi criteria decision making tools. The Journal of The South African Institute of Mining and Metallurgy, 104, 9, 493–498.
8. Kazakidis, V. N., Mayer, Z., Scoble, M. J., (2004). Decision making using the analytic hierarchy process in mining engineering, Transactions of the Institution of Mining and Metallurgy: Mining Technology, 113, A30–A42.
9. Ataei, M., (2005). Multicriteria selection for an alumina-cement plant location in East Azerbaijan province of Iran. The Journal of The South African Institute of Mining and Metallurgy, 105, 8, 507–513.

10. De Almeida, A. T., Alencar, L. H., De Miranda, C. M. G., (2005). Mining methods selection based on multi criteria models, *Proceedings of the Application of Computers and Operations Research in the Mineral Industry*, Dessureault, Ganguli, Kecojovic and Dwyer (eds), Taylor and Francis Group, London, ISBN 04 1537 449 9, 19–24.
11. Bottero, M., Peila, D., (2005). The use of the Analytic Hierarchy Process for the comparison between micro tunneling and trench excavation, *Tunnelling and Underground Space Technology*, 20, 6, 501–513.
12. Uysal, Ö., Demirci, A., (2006). Shortwall stoping versus sub-level longwall caving-retreat in Eli coal Fields, *The Journal of the Southern African Institute of Mining and Metallurgy*, 106, 6, 425–432.
13. Bascetin, A., Oztas, O., Kanli, A. I., (2006). EQS: a computer software using fuzzy logic for equipment selection in mining engineering, *The Journal of the Southern African Institute of Mining and Metallurgy*, 106, 63–70.
14. Acaroglu, O., Ergin, H. Eskikaya, S., (2006a). Analytical hierarchy process for selection of road headers, *The Journal of the Southern African Institute of Mining and Metallurgy*, 106, 569–575.
15. Acaroglu, O., Feridunoglu, C., Tumac, D., (2006b), Selection of road headers by fuzzy multi attribute decision making method, *Transactions of the Institute of Mining & Metallurgy, Section A*, 115, A91–A98.
16. Wu, H., Yuan, J., Zhang, Y., Song, S., (2007). The evaluation of the core competition of the Wugang Mining Cooperation using the Analytic Hierarchy Process, *The International Journal of Mineral Resources Engineering*, 12, 2, 119–126.
17. Aghajani, A., Osanloo, M., (2007). Application of AHP-TOPSIS Method for Loading-Haulage Equipment Selection in Open pit Mines, XXVII international Mining Convention, Mexico.
18. Musingwini, C., Minnitt, R. C. A., (2008). Ranking the efficiency of selected platinum mining methods using the analytic hierarchy process (AHP), *Third International Platinum Conference, Platinum in Transformation, The Southern African Institute of Mining and Metallurgy*, 319-326.
19. Ataei, M., Sereshki, F., Jamshidi, M., Jalali, S. M. E., (2008). Suitable mining method for the Golbini No.8 deposit in Jajarm (Iran) by using TOPSIS method, *Mining Technology: Transactions of the Institute of Mining & Metallurgy, Section A*, 117, 1, 1-5.
20. Ataei, M., Sereshki, F., Jamshidi, M., Jalali, S. M. E., (2008). Mining method selection by AHP approach, *Journal of the south African institute of mining and metallurgy (SAIMM)*, 108, 741-749.
21. Zare Naghadehi, M., Mikaeil, R., Ataei, M., (2008). The application of fuzzy analytic hierarchy process (FAHP) approach to selection of optimum underground mining method for Jajarm Bauxite Mine, Iran, *Expert Systems with Applications*, 36, 4, 8218-8226.
22. Yavuz, M., Iphar, M., Once, G., (2008). The optimum support design selection by using AHP method for the main haulage road in WLC Tuncbilek colliery, *Tunneling and Underground Space Technology*, 23, 1, 111–119.
23. Karadogan, A., Kahriman, A., Ozer, U., (2008). Application of fuzzy set theory in the selection of underground mining method, *The Journal of the Southern African Institute of Mining and Metallurgy*, 108, 2, 73–79.
24. Alpay, S., Yavuz, M., (2009). Underground mining method selection by decision making tools, *Tunneling and Underground Space Technology*, 24, 1, 173–184.
25. Oraee, K., Hosseini, N., Gholinejad, M., (2009). A New Approach for Determination of Tunnel Supporting System Using Analytical Hierarchy Process (AHP), *Proceeding of 2009 Coal Operators Conference, The AusIMM Illawarra Branch, University of Wollongong*, 78- 89.
26. Azadeh, A., Osanloo, M., Ataei, M., (2009). A new approach to mining method selection based on modifying the Nicholas technique, *Applied Soft Computing*, 110, 8, 2009, 481-490.
27. Safari, M., Ataei, M., Khalokakaei, R., Karamozian, M., (2010). Mineral processing plant location using the analytic hierarchy process- a case study: The Sangan iron ore mine (Phase 1), *Mining Science and Technology (China)*, 20, 5, 691-695.
28. Oraee, K., Hosseini, N., Gholinejad, M., (2009). A new approach for determination of tunnel supporting system using analytical hierarchy process (AHP), *Coal Operators' Conference*, 78-89.
29. Lang, L., Fu-bao, Zhou, (2010). A comprehensive hazard evaluation system for spontaneous combustion of coal in underground mining, *International Journal of Coal Geology*, 82, 1-2, 27-36.
30. Azadeh, A., Osanloo, M., Ataei, M., (2010). A new approach to mining method selection based on modifying the Nicholas technique, *Applied Soft Computing*, 10, 4, 1040-1061.
31. Soltanmohammadi, H., Osanloo, M., Sami, A., Malekzadeh, S. B., (2010). Selection of practical bench height in open pit mining using a multi-criteria decision making solution, *Journal Geology and Mining Research*, 2, 48-59.

32. Aghajani Bazazi, A., Osanloo, M., Karimi, B., (2011). Deriving preference order of open pit mines equipment through MADM methods: application of modified VIKOR method, *Expert Systems with Applications*, 38, 3, 2550-2556.
33. Golestanifar, M., Golshtasbi, K., Jafarian, M., Adnani, S., (2011). A multi-dimensional approach to the assessment of tunnel excavation methods, *International Journal of Rock Mechanics and Mining Sciences*, 48, 7, 1077-1085.
34. Fouladgar, M. M., Yazdani-Chamzini, A., Zavadskas, E. K., (2012). Risk evaluation of tunneling projects, *Archives of Civil and Mechanical Engineering*, 12, 1, 1-12.
35. Yazdani-Chamzini, A., Haji Yakhchali, S., (2012). Tunnel Boring Machine (TBM) selection using fuzzy multicriteria decision making methods, *Tunnelling and Underground Space Technology*, 30, 194-204.
36. Badri, A., Nadeau, S., Ghodossou, Andre, (2013). A new practical approach to risk management for underground mining project in Quebec, *Journal of Loss Prevention in the Process Industries*, 26, 6, 1145-1158.
37. Mirhedayatian, M., Jafarian Jelodar, M., Adnani, S., Akbarnejad, M., Farzipoor Saen, R., (2013). A new approach for prioritization in fuzzy AHP with an application for selecting the best tunnel ventilation system, *The International Journal of Advanced Manufacturing Technology*, 68, 9-12, 2589-2599.
38. Hashemkhani Zolfani, S., Esfahani, M. H., Bitarafan, M., Kazimieras Zavadskas, E., Lale Arefi, Sh., (2013). Developing a new hybrid MCDM method for selection of the optimal alternative of mechanical longitudinal ventilation of tunnel pollutants during automobile accidents, *Transport*, 28, 1, 89-96.
39. Rahimi Ghazikalayeh, A., Amirafshari, M., Mkrchyan, H. M., Taji, M., (2013). Application of fuzzy hybrid analytic network process in equipment selection of open-pit metal mines, *International Journal of Research in Industrial Engineering*, 2, 3, 35-46.
40. Tzeng, G. H., Huang, J. J., (2011). *Multiple attribute decision making: methods and applications*, Talor and Francis Group.
41. Yoon, K. P., Hwang, C. L., (1995). *Multiple attribute decision making: an introduction*, SAGE Publication, Inc.
42. Hwang, C., Yoon, K., (1981). *Multi attribute decision making methods and applications: a state of the art survey*, New York: Verlag.
43. Foroughi, A., Esfahani, M. J., (2012). An empirical study for ranking risk factors using linear assignment: a case study of road construction, *Management Science Letters*, 2, 615-622.
44. Rafiee, R., (1388). Select the appropriate storage system Beheshtabad water tunnel using multi criteria decision-making (MADM), MS Thesis, Department of Mining Engineering, Shahrood University of Technology. (In persion)